CSA 1 PAD TYPE SPLITTER BOX STEEL

The PAD splitter boxes are designed for 600 V (max.) service, 3 or 4 wires. They are manufactured from 14 Ga steel. The enclosures have mounting holes in the back, and come complete with hinge cover.
The splitter blocks are factory installed.
Options include: screw cover, weatherproof , and custom paint colors .

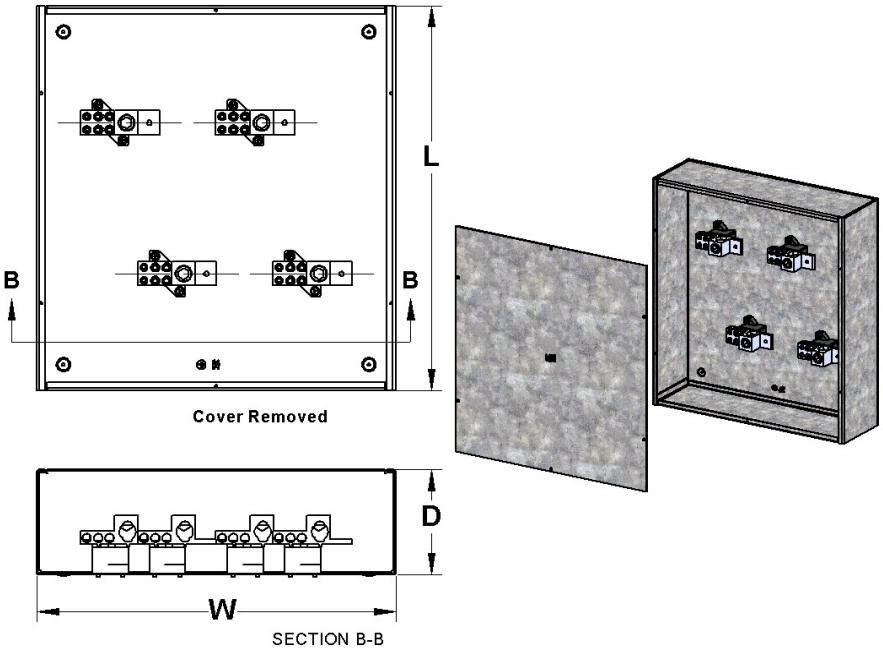

Define: **PAD-B-G** (**Series**) **A** (**Material**) **B** (**Amperage**) **C** (**Number of wires**)

A B C
Example : **PAD-B-G-404**: Steel / 400 Amp / 4 wire

Cat. No.		Main Lugs			Branch Lugs					
3 Wire	4 Wire	Amp	Qty.	Wires	Qty.	Wires	L	W	D	LBS
PAD-B-G-103	PAD-B-G-104	125	1	14-1/0	6	14-2	12	12	4	11
PAD-B-G-203	PAD-B-G-204	225	1	6-300 MCM	6	14-2/0	18	12	5	16
PAD-B-G-403	PAD-B-G-404	400	2 x 1/0-250 MCM or 1 x 4 – 600 MCM		2 x 14-3/0 and 4 x 6-4/0		22	20	6	34
PAD-B-G-603	PAD-B-G-604	600	4 x 1/0-250 MCM or 2 x 4 – 600 MCM		2 x 14-3/0 and 4 x 6-4/0		26	25	7	49