
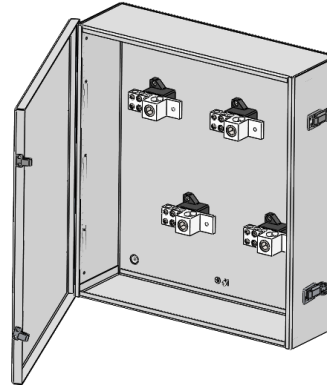


CSA 1 PAD TYPE SPLITTER BOX STEEL

The PAD splitter boxes are designed for 600 V (max.) service, 3 or 4 wires. They are manufactured from 14 Ga steel. The enclosures have mounting holes in the back, and

come complete with hinge cover. The splitter blocks are factory installed. Options include: screw cover, weatherproof, and custom paint colors.

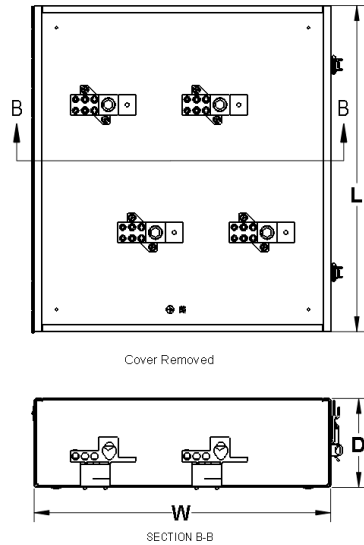

Define: **PAD-B** **A** **B** **C**
 Series **Material** **Amperage** **Number of wires**

A B C

Example : **PAD-B-S-404**: Steel / 400 Amp / 4 wire

<u>Cat. No.</u>		<u>Main Lugs</u>			<u>Branch Lugs</u>					
<u>3 Wire</u>	<u>4 Wire</u>	<u>Amp</u>	<u>Qty.</u>	<u>Wires</u>	<u>Qty.</u>	<u>Wires</u>	<u>L</u>	<u>W</u>	<u>D</u>	<u>LBS</u>
PAD-B-S-103	PAD-B-S-104	125	1	14-1/0	6	14-2	12	12	4	11
PAD-B-S-203	PAD-B-S-204	225	1	6-300 MCM	6	14-2/0	18	12	5	16
PAD-B-S-403	PAD-B-S-404	400		2 x 1/0-250 MCM or 1 x 4 – 600 MCM		2 x 14-3/0 and 4 x 6-4/0	22	20	6	34
PAD-B-S-603	PAD-B-S-604	600		4 x 1/0-250 MCM or 2 x 4 – 600 MCM		2 x 14-3/0 and 4 x 6-4/0	26	25	7	49